

Thyristor Module

$$V_{RRM} = 2 \times 1200 \text{ V}$$

$$I_{TAV} = 50 \text{ A}$$

$$V_T = 1.17 \text{ V}$$

Phase leg

Part number

MCMA50P1200TA



Backside: isolated

 E72873



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-240AA

- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Thyristor				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1200	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1200\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			100	μA
		$V_{R/D} = 1200\text{ V}$	$T_{VJ} = 140^{\circ}\text{C}$			6	mA
V_T	forward voltage drop	$I_T = 50\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.25	V
		$I_T = 100\text{ A}$				1.48	V
		$I_T = 50\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1.17	V
		$I_T = 100\text{ A}$				1.44	V
I_{TAV}	average forward current	$T_C = 85^{\circ}\text{C}$	$T_{VJ} = 140^{\circ}\text{C}$			50	A
$I_{T(RMS)}$	RMS forward current	180° sine				79	A
V_{T0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 140^{\circ}\text{C}$			0.89	V
r_T	slope resistance					5.3	m Ω
R_{thJC}	thermal resistance junction to case					0.7	K/W
R_{thCH}	thermal resistance case to heatsink				0.2		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			160	W
I_{TSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			800	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			865	A
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			680	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			735	A
I^2t	value for fusing	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			3.20	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			3.12	kA ² s
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			2.31	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			2.25	kA ² s
C_J	junction capacitance	$V_R = 400\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		32		pF
P_{GM}	max. gate power dissipation	$t_p = 30\text{ }\mu\text{s}$	$T_C = 140^{\circ}\text{C}$			10	W
		$t_p = 300\text{ }\mu\text{s}$				5	W
P_{GAV}	average gate power dissipation					0.5	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 140^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 150\text{ A}$				150	A/ μs
		$t_p = 200\text{ }\mu\text{s}; di_G/dt = 0.45\text{ A}/\mu\text{s};$ $I_G = 0.45\text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 50\text{ A}$				500	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^{\circ}\text{C}$			1000	V/ μs
		$R_{GK} = \infty$; method 1 (linear voltage rise)					
V_{GT}	gate trigger voltage	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			1.5	V
			$T_{VJ} = -40^{\circ}\text{C}$			1.6	V
I_{GT}	gate trigger current	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			78	mA
			$T_{VJ} = -40^{\circ}\text{C}$			200	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^{\circ}\text{C}$			0.2	V
I_{GD}	gate non-trigger current					5	mA
I_L	latching current	$t_p = 10\text{ }\mu\text{s}$	$T_{VJ} = 25^{\circ}\text{C}$			200	mA
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
I_H	holding current	$V_D = 6\text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^{\circ}\text{C}$			100	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^{\circ}\text{C}$			2	μs
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
t_q	turn-off time	$V_R = 100\text{ V}; I_T = 50\text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^{\circ}\text{C}$ $di/dt = 10\text{ A}/\mu\text{s}$ $dv/dt = 20\text{ V}/\mu\text{s}$ $t_p = 200\text{ }\mu\text{s}$			150		μs

Package TO-240AA				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal				100	A
T_{VJ}	virtual junction temperature			-40		140	°C
T_{op}	operation temperature			-40		125	°C
T_{stg}	storage temperature			-40		125	°C
Weight					81		g
M_D	mounting torque			2.5		4	Nm
M_T	terminal torque			2.5		4	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	13.0	9.7			mm
$d_{Spb/Apb}$		terminal to backside	16.0	16.0			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	4800			V
		t = 1 minute		4000			V



Part description

M = Module
 C = Thyristor (SCR)
 M = Thyristor
 A = (up to 1800V)
 50 = Current Rating [A]
 P = Phase leg
 1200 = Reverse Voltage [V]
 TA = TO-240AA-1B

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCMA50P1200TA	MCMA50P1200TA	Box	36	513943

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 140^{\circ}\text{C}$



Thyristor

$V_{0\max}$	threshold voltage	0.89	V
$R_{0\max}$	slope resistance *	4.1	mΩ

Technical drawing of a 5-pin DIN connector. The drawing shows the front and side views with the following dimensions and labels:

- Overall length: 92 ± 0.5
- Length from first pin center to end: 80 ± 0.3
- Pin 1 diameter: 5.5 ± 0.1
- Pin 2 diameter: 5.5 ± 0.1
- Pin 3 diameter: 5.5 ± 0.1
- Pin 4 diameter: 5.5 ± 0.1
- Pin 5 diameter: 5.5 ± 0.1
- Pin 1 thread: M5
- Pin 1 position: 1
- Pin 2 position: 2
- Pin 3 position: 3
- Pin 4 position: 4
- Pin 5 position: 5
- Pin 6 position: 6
- Pin 7 position: 7
- Pin 8 position: 8
- Pin 9 position: 9
- Pin 10 position: 10
- Pin 11 position: 11
- Pin 12 position: 12
- Pin 13 position: 13
- Pin 14 position: 14
- Pin 15 position: 15
- Pin 16 position: 16
- Pin 17 position: 17
- Pin 18 position: 18
- Pin 19 position: 19
- Pin 20 position: 20
- Pin 21 position: 21
- Pin 22 position: 22
- Pin 23 position: 23
- Pin 24 position: 24
- Pin 25 position: 25
- Pin 26 position: 26
- Pin 27 position: 27
- Pin 28 position: 28
- Pin 29 position: 29
- Pin 30 position: 30
- Pin 31 position: 31
- Pin 32 position: 32
- Pin 33 position: 33
- Pin 34 position: 34
- Pin 35 position: 35
- Pin 36 position: 36
- Pin 37 position: 37
- Pin 38 position: 38
- Pin 39 position: 39
- Pin 40 position: 40
- Pin 41 position: 41
- Pin 42 position: 42
- Pin 43 position: 43
- Pin 44 position: 44
- Pin 45 position: 45
- Pin 46 position: 46
- Pin 47 position: 47
- Pin 48 position: 48
- Pin 49 position: 49
- Pin 50 position: 50
- Pin 51 position: 51
- Pin 52 position: 52
- Pin 53 position: 53
- Pin 54 position: 54
- Pin 55 position: 55
- Pin 56 position: 56
- Pin 57 position: 57
- Pin 58 position: 58
- Pin 59 position: 59
- Pin 60 position: 60
- Pin 61 position: 61
- Pin 62 position: 62
- Pin 63 position: 63
- Pin 64 position: 64
- Pin 65 position: 65
- Pin 66 position: 66
- Pin 67 position: 67
- Pin 68 position: 68
- Pin 69 position: 69
- Pin 70 position: 70
- Pin 71 position: 71
- Pin 72 position: 72
- Pin 73 position: 73
- Pin 74 position: 74
- Pin 75 position: 75
- Pin 76 position: 76
- Pin 77 position: 77
- Pin 78 position: 78
- Pin 79 position: 79
- Pin 80 position: 80
- Pin 81 position: 81
- Pin 82 position: 82
- Pin 83 position: 83
- Pin 84 position: 84
- Pin 85 position: 85
- Pin 86 position: 86
- Pin 87 position: 87
- Pin 88 position: 88
- Pin 89 position: 89
- Pin 90 position: 90
- Pin 91 position: 91
- Pin 92 position: 92
- Pin 93 position: 93
- Pin 94 position: 94
- Pin 95 position: 95
- Pin 96 position: 96
- Pin 97 position: 97
- Pin 98 position: 98
- Pin 99 position: 99
- Pin 100 position: 100
- Pin 101 position: 101
- Pin 102 position: 102
- Pin 103 position: 103
- Pin 104 position: 104
- Pin 105 position: 105
- Pin 106 position: 106
- Pin 107 position: 107
- Pin 108 position: 108
- Pin 109 position: 109
- Pin 110 position: 110
- Pin 111 position: 111
- Pin 112 position: 112
- Pin 113 position: 113
- Pin 114 position: 114
- Pin 115 position: 115
- Pin 116 position: 116
- Pin 117 position: 117
- Pin 118 position: 118
- Pin 119 position: 119
- Pin 120 position: 120
- Pin 121 position: 121
- Pin 122 position: 122
- Pin 123 position: 123
- Pin 124 position: 124
- Pin 125 position: 125
- Pin 126 position: 126
- Pin 127 position: 127
- Pin 128 position: 128
- Pin 129 position: 129
- Pin 130 position: 130
- Pin 131 position: 131
- Pin 132 position: 132
- Pin 133 position: 133
- Pin 134 position: 134
- Pin 135 position: 135
- Pin 136 position: 136
- Pin 137 position: 137
- Pin 138 position: 138
- Pin 139 position: 139
- Pin 140 position: 140
- Pin 141 position: 141
- Pin 142 position: 142
- Pin 143 position: 143
- Pin 144 position: 144
- Pin 145 position: 145
- Pin 146 position: 146
- Pin 147 position: 147
- Pin 148 position: 148
- Pin 149 position: 149
- Pin 150 position: 150
- Pin 151 position: 151
- Pin 152 position: 152
- Pin 153 position: 153
- Pin 154 position: 154
- Pin 155 position: 155
- Pin 156 position: 156
- Pin 157 position: 157
- Pin 158 position: 158
- Pin 159 position: 159
- Pin 160 position: 160
- Pin 161 position: 161
- Pin 162 position: 162
- Pin 163 position: 163
- Pin 164 position: 164
- Pin 165 position: 165
- Pin 166 position: 166
- Pin 167 position: 167
- Pin 168 position: 168
- Pin 169 position: 169
- Pin 170 position: 170
- Pin 171 position: 171
- Pin 172 position: 172
- Pin 173 position: 173
- Pin 174 position: 174
- Pin 175 position: 175
- Pin 176 position: 176
- Pin 177 position: 177
- Pin 178 position: 178
- Pin 179 position: 179
- Pin 180 position: 180
- Pin 181 position: 181
- Pin 182 position: 182
- Pin 183 position: 183
- Pin 184 position: 184
- Pin 185 position: 185
- Pin 186 position: 186
- Pin 187 position: 187
- Pin 188 position: 188
- Pin 189 position: 189
- Pin 190 position: 190
- Pin 191 position: 191
- Pin 192 position: 192
- Pin 193 position: 193
- Pin 194 position: 194
- Pin 195 position: 195
- Pin 196 position: 196
- Pin 197 position: 197
- Pin 198 position: 198
- Pin 199 position: 199
- Pin 200 position: 200
- Pin 201 position: 201
- Pin 202 position: 202
- Pin 203 position: 203
- Pin 204 position: 204
- Pin 205 position: 205
- Pin 206 position: 206
- Pin 207 position: 207
- Pin 208 position: 208
- Pin 209 position: 209
- Pin 210 position: 210
- Pin 211 position: 211
- Pin 212 position: 212
- Pin 213 position: 213
- Pin 214 position: 214
- Pin 215 position: 215
- Pin 216 position: 216
- Pin 217 position: 217
- Pin 218 position: 218
- Pin 219 position: 219
- Pin 220 position: 220
- Pin 221 position: 221
- Pin 222 position: 222
- Pin 223 position: 223
- Pin 224 position: 224
- Pin 225 position: 225
- Pin 226 position: 226
- Pin 227 position: 227
- Pin 228 position: 228
- Pin 229 position: 229
- Pin 230 position: 230
- Pin 231 position: 231
- Pin 232 position: 232
- Pin 233 position: 233
- Pin 234 position: 234
- Pin 235 position: 235
- Pin 236 position: 236
- Pin 237 position: 237
- Pin 238 position: 238
- Pin 239 position: 239
- Pin 240 position:

Thyristor

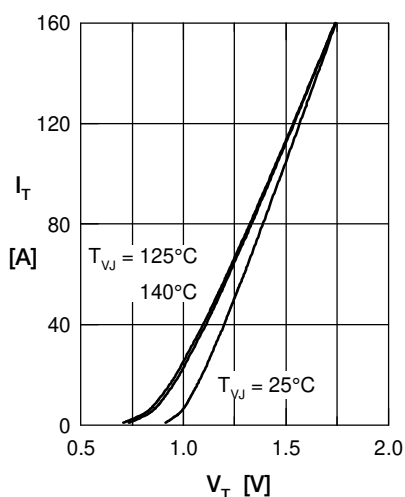


Fig. 1 Forward characteristics

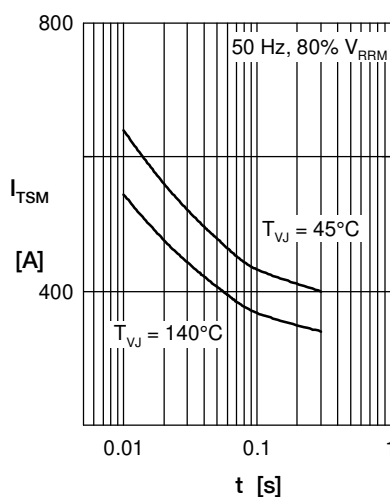


Fig. 2 Surge overload current
 I_{TSM} : crest value, t : duration

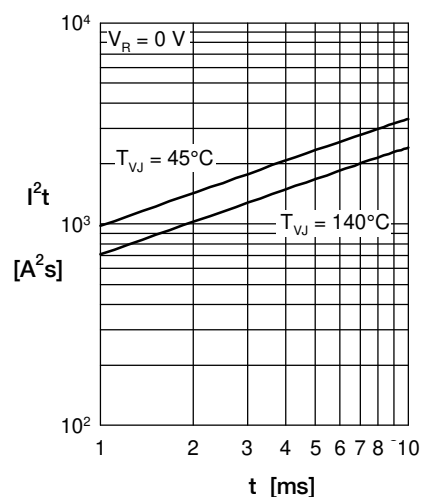


Fig. 3 I^2t versus time (1-10 s)

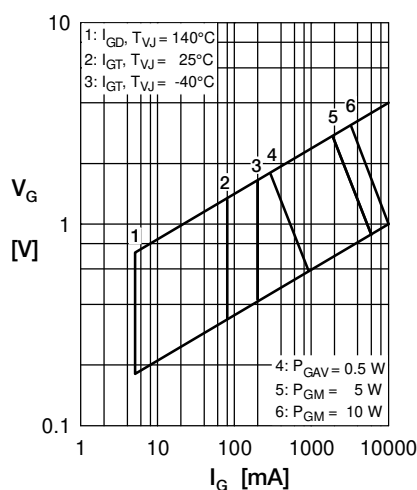


Fig. 4 Gate voltage & gate current

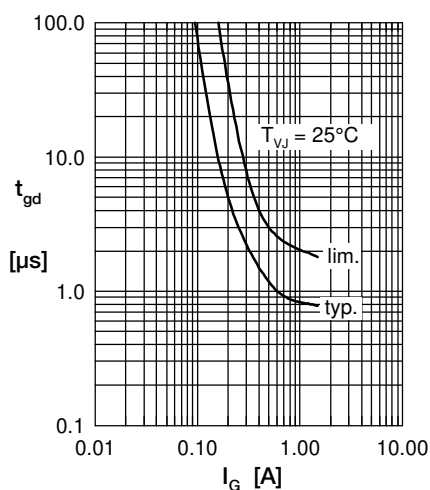


Fig. 5 Gate controlled delay time t_{gd}

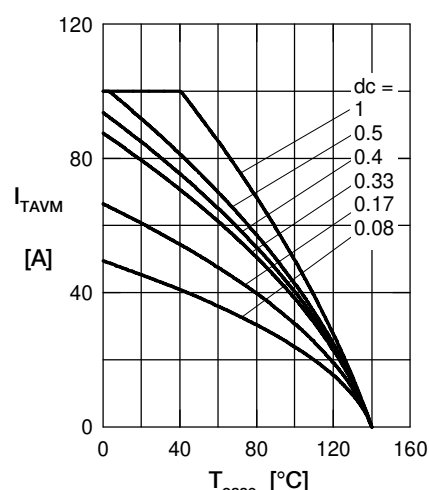


Fig. 6 Max. forward current at case temperature

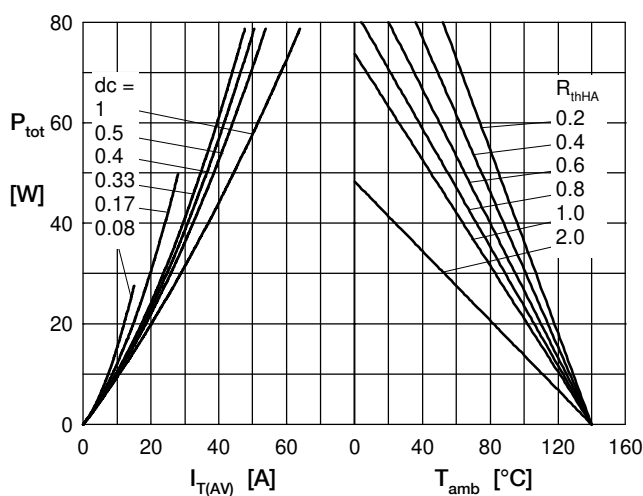


Fig. 7a Power dissipation versus direct output current
 Fig. 7b and ambient temperature

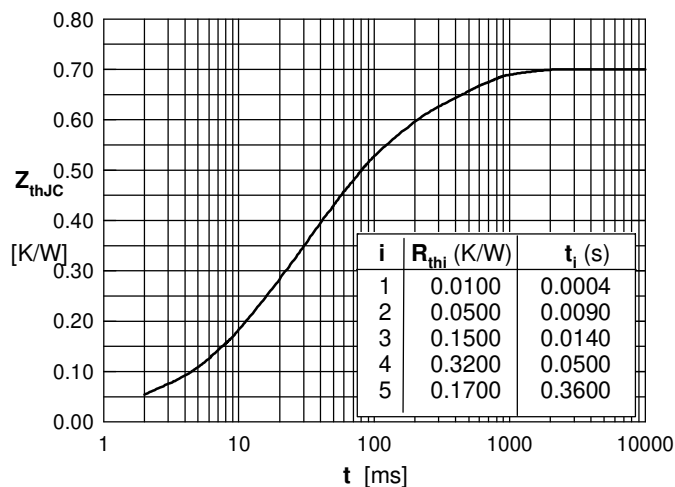


Fig. 8 Transient thermal impedance junction to case