


Technical data sheet

Surge arrester, 3-pole + NPE with remote signalling

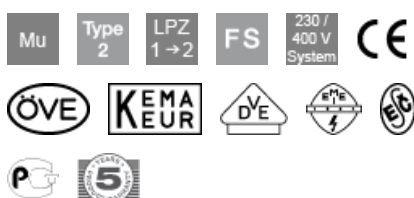

V 20-C/...: Surge protection device Type 2 Class C) to VDE 0675 part 6-11 (DIN EN 61643-11).

- With new MultiBase base part and Multi-connection clamps
- Complete unit consisting of upper part and base, pre-mounted and ready for connection
- VDE-tested
- Suitable for TN- and TT- network systems
- Plug-in upper part; upper part can be separated from base without tools
- With remote signalling, potential-free changeover contact, for function monitoring
- Including thermal and dynamic separating device
- With visual display of defects
- High current conductivity and long service life
- Marked connections

Application example: residential buildings, single-family homes

Type	Maximum continuous voltage V	Version	Pack Units	Weight kg/100 pc.	Art.-No.
V20-C 1+NPE+FS	280	1 + NPE	1	22.500	5094760
V20-C 2+NPE+FS	280	2 + NPE	1	32.500	5094762
V20-C 3+NPE+FS	280	3 + NPE	1	43.300	5094765

/pc.